




LightvaultTM
style | design | control

HEATING RANGE

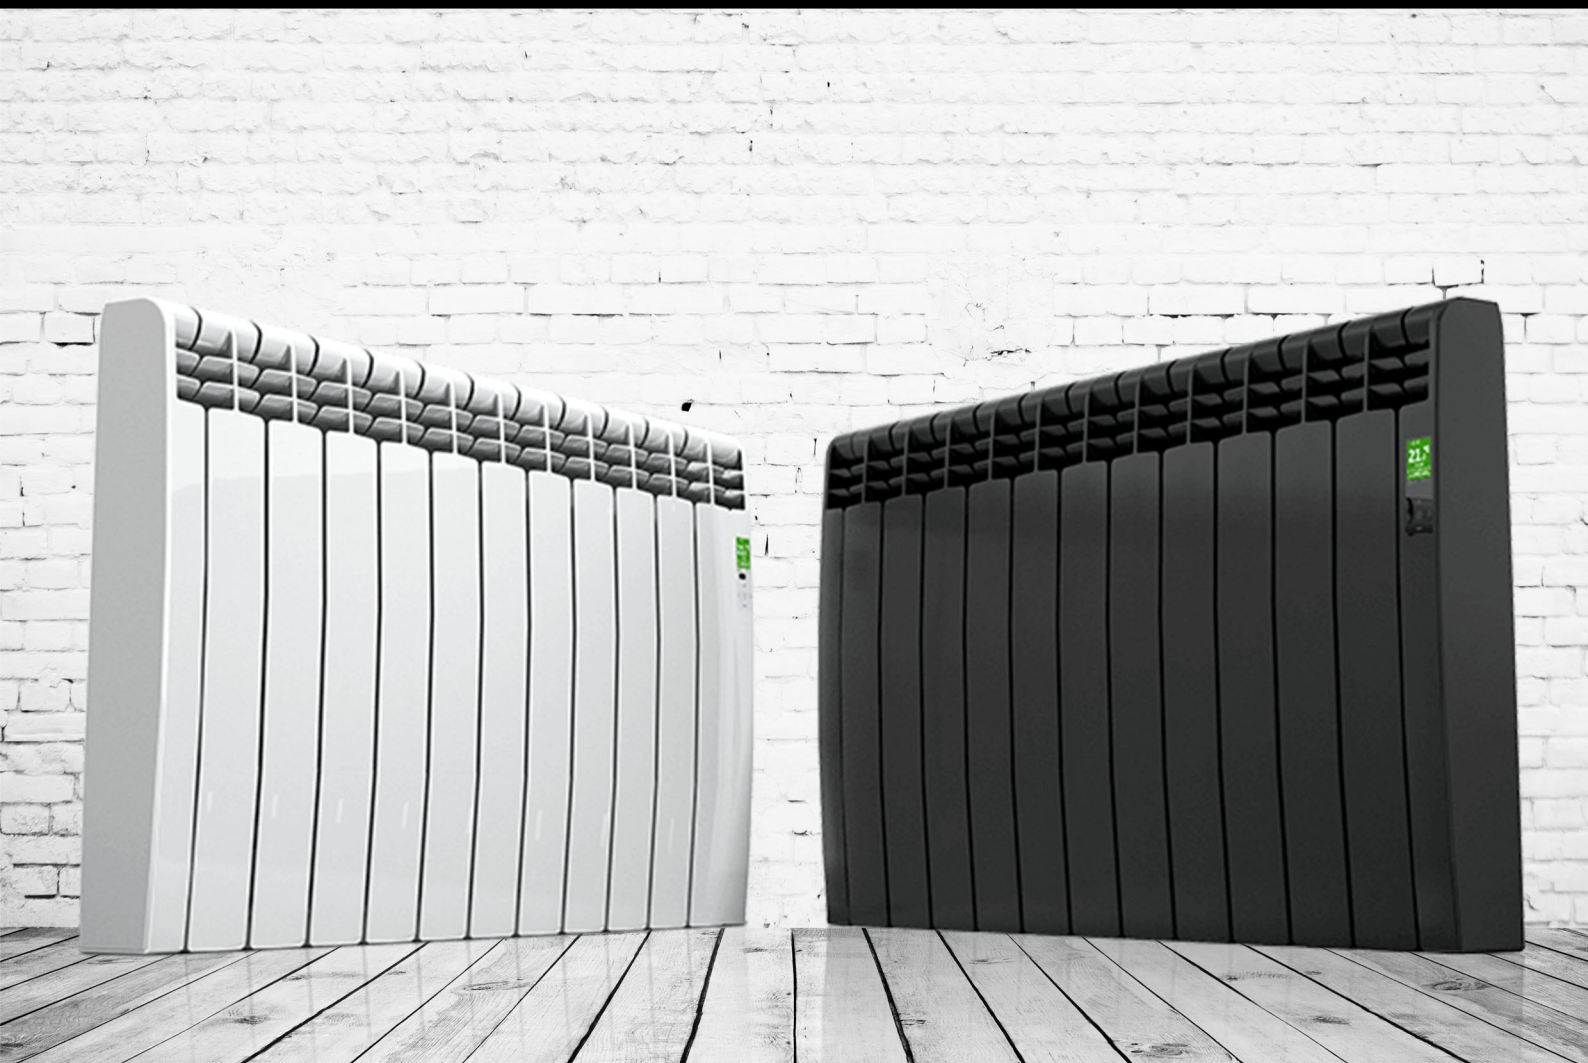

OLYMPIA^{Wi-Fi}

Digital electric radiator
with natural stone core and Wi-Fi module inside



Soapstone
core





TOTAL CONTROL WITH ROINTE CONNECT APP

Control all functionality of your connected products via smartphone with the Rointe Connect App available for iOS and Android platforms.

MODEL	ORI0500RAD	ORI0750RAD	ORI1000RAD	ORI1250RAD	ORI1500RAD
Nominal Power (W)	500	750	1.000	1,250	1,500
Elements	3	5	6	8	9
DIMENSIONS					
Width (mm)	345	505	585	747	827
Height (mm)	575	575	575	575	575
Depth (mm)	95	95	95	95	95
CHARACTERISTICS					
Weight (kg)	11	18	21	28	33
Voltage (V)	230 V AC				
Temperature range	7 - 30 °C				
Cable insulation	PVC				
Finishes	White RAL 9016				
EAN CODE	8435556130604	8435556130611	8435556130628	8435556130635	8435556130642



Low consumption



Wi-Fi direct without gateways



Open Windows function



24/7 programming



Pre-installed programs



10 years guarantee on the body



2 years guarantee on the electronics



High contrast TFT screen

Right side end panel made of fireproof plastic

Control panel made of methacrylate

Consumption indicator

Touch control panel

PALAOS

NEW
PRODUCT

Vertical electric radiator
with control panel

CHARACTERISTICS

- 100% aluminium body
- Class II protection
- Energy-saving functions
- Compact control panel with mechanical keyboard
- Body: 10 years guarantee
- Electronics: 2 years guarantee



RADIATORS

Product Information

MODELS	WHITE	PIW1000RAD	PIW1500RAD	PIW2000RAD
	BLACK	PIB1000RAD	PIB1500RAD	PIB02000RAD
Elements		2	3	4
Nominal power (W)		1,000	1,500	2,000
DIMENSIONS				
Width x height x depth (mm)		236 x 1,800 x 90	356 x 1,800 x 90	476 x 1,800 x 90
Installed depth (mm)		110	110	110
MECHANICAL CHARACTERISTICS				
Weight (kg)		11	15.5	20.5
Finishes		White RAL 9016 / Black sandblast (SW3051)		
FUNCTIONS		TECHNICAL DATA		
Anti-frost / Comfort / Night modes	✓	Armoured steel resistance	✓	
Manual / Automatic modes	✓	High-purity aluminium elements	✓	
Open Windows function	✓	High heat transfer thermal fluid	✓	
Programmable 24/7	✓	Control panel with mechanical keyboard	✓	
REGULATIONS & GUARANTEES		Thermostat with microprocessor	✓	
2004/108/CE EMC Directive	✓	Protection Grade		IPX4
2006/95/CE LVD Directive	✓	Class II protection	✓	
EU 2015/1188 ECODESIGN Directive	✓	INSTALLATION		
Guarantee on body	10 years	Template & installation kit	✓	
Guarantee on electronic components	2 years			

atc

Outdoor Heater



Approved for use outdoors in wet conditions.

The heater is manufactured in Europe and is already installed in many Pubs, Restaurants, Hotels & outdoor leisure areas where instant heat is required

PRODUCT FEATURES

- 1800W Long Life Lamp with Tungsten Wire
- Low Running Costs
- Instant Heat
- Powerful Heat output
- Waterproof IP65
- Easy to Install
- Silent Running
- Wall Bracket Included



LightvaultTM.ie

style | design | control

Lightvault

Unit 2, Redcow Retail Centre,
Robinhood Road,
Dublin 22
D22 X4V8

Ph: +353 (01) 464 22 88
Email: salesdesk@lightvault.ie

